





WEST MICHIGAN RUBBER & SUPPLY
1.800.533.9677
sales@westmichiganrubber.com

50 SERIES PNEUMATIC QUICK COUPLINGS


Couplers

Female Pipe Thread




Body Size (in.)	Part No. Brass	Thread Size NPTF	Dimensions (in.)			Wt. (LB) P/Piece
			Overall Length	Hex Size	Largest Diameter	
			A	B	C	
1/4	B53	1/4-18	1.83	0.75	0.90	0.20
1/4	B53E	3/8-18	1.95	0.81	0.94	0.21

Male Pipe Thread



Body Size (in.)	Part No. Brass	Thread Size NPTF	Dimensions (in.)			Wt. (LB) P/Piece
			Overall Length	Hex Size	Largest Diameter	
			A	B	C	
1/4	B52	1/4-18	2.05	0.75	0.90	0.20
1/4	B52E	3/8-18	2.08	0.75	0.90	0.21

Push-Lok Hose Barb*




Body Size (in.)	Part No. Brass	Hose I.D.	Dimensions (in.)			Wt. (LB) P/Piece
			Overall Length	Hex Size	Largest Diameter	
			A	B	C	
1/4	B50-3BP	1/4	2.32	0.75	0.90	0.19
1/4	B50-5BP	3/8	2.47	0.75	0.90	0.20

* Push-Lok hose barbs are designed for use with Push-Lok hose and do not require clamps.

Nipples


Female Pipe Thread



Body Size (in.)	Part No. Steel	Thread Size NPTF	Overall Length	Dimensions (in.)			Wt. (LB) P/Piece
				Exposed Length*	Hex Size	Largest Diameter	
			D	E	F	G	
1/4	A3C	1/4-18	1.47	0.66	0.62	0.72	0.04

* This dimension represents portion of nipple that is exposed when nipple is inserted in a Parker 50 Series coupler.


Male Pipe Thread



Body Size (in.)	Part No. Steel	Thread Size NPTF	Overall Length	Dimensions (in.)			Wt. (LB) P/Piece
				Exposed Length*	Hex Size	Largest Diameter	
			D	E	F	G	
1/4	A2C	1/4-18	1.62	0.82	0.56	0.65	0.05

* This dimension represents portion of nipple that is exposed when nipple is inserted in a Parker 50 Series coupler.


Standard Hose Barb

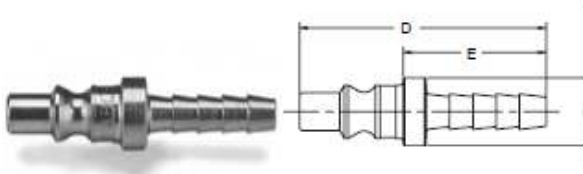

Body Size (in.)	Part No. Steel	Hose I.D.	Dimensions (in.)			Wt. (LB) P/Piece
			Overall Length	Exposed Length*	Largest Diameter	
			D	E	G	
1/4	A8C	1/4	1.63	0.85	.043	0.03

* This dimension represents portion of nipple that is exposed when nipple is inserted in a Parker 50 Series coupler.

Push-Lok Hose Barb**

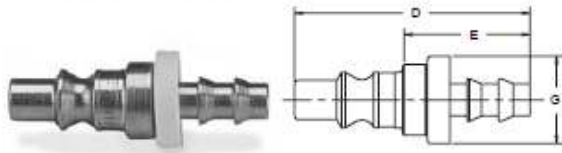

Body Size (in.)	Part No. Steel	Hose I.D.	Dimensions (in.)			Wt. (LB) P/Piece
			Overall Length	Exposed Length*	Largest Diameter	
			D	E	G	
1/4	A8CP	1/4	1.65	0.87	0.67	0.03

* This dimension represents portion of nipple that is exposed when nipple is inserted in a Parker 50 Series coupler.

** Push-Lok hose barbs are designed for use with Parker push-lok hose and do not require clamps.