



**WEST MICHIGAN RUBBER & SUPPLY**  
**1.800.533.9677**  
**sales@westmichiganrubber.com**

# VINYLFLOW®

## Premium PVC Drip Irrigation & Water Discharge Hose

### Applications:

- Drip irrigation • Construction • Industrial • Agricultural


### Construction:

- Features a balanced polyester yarn spiral wrap, longitudinal strength member and homogeneous PVC tube and cover to prevent separation.

### Features & Benefits:

- **Smooth tube** - Provides low friction loss.
- **Drip irrigation** - Hose lays straight with minimal elongation under pressure. Hose may be punched easily without tearing.
- **Ultraviolet inhibitors** - Reduces aging and weather checking.
- **Storage** - All coils have PVC cores for easier dispensing. Hoses coil flat for easy storage.

Service Temperature: -5° F (-20° C) to 170° F (+76° C)

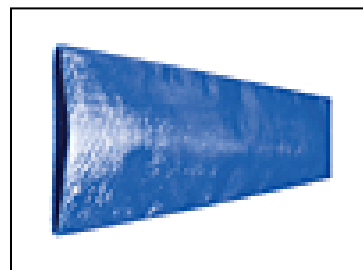

### Nominal Specifications

| SERIES NO. | SIZE<br>(In.) (mm) |       | HOSE ID<br>(In.) (mm) |       | APPROXIMATE<br>WALL THICKNESS<br>(In.) | WORKING<br>PRESSURE<br>(PSI) | COIL<br>LENGTH<br>(ft.) | APPROX.<br>WEIGHT<br>(lbs./coil) |
|------------|--------------------|-------|-----------------------|-------|----------------------------------------|------------------------------|-------------------------|----------------------------------|
| VF150      | 1 1/2              | 38.1  | 1.614                 | 41.0  | .0669                                  | 80                           | 300                     | 48.0                             |
| VF200      | 2                  | 50.8  | 2.09                  | 53.1  | .0669                                  | 80                           | 300                     | 69.0                             |
| VF250      | 2 1/2              | 63.5  | 2.598                 | 66.0  | .0787                                  | 80                           | 300                     | 87.0                             |
| VF300      | 3                  | 76.2  | 3.130                 | 79.5  | .0787                                  | 70                           | 300                     | 117.0                            |
| VF400      | 4                  | 101.6 | 4.134                 | 105.0 | .0827                                  | 70                           | 300                     | 156.0                            |
| VF500      | 5                  | 127.0 | 5.039                 | 128.0 | .0866                                  | 40                           | 300                     | 204.0                            |
| VF600      | 6                  | 153.4 | 6.181                 | 157.0 | .0866                                  | 50                           | 300                     | 258.0                            |
| VF800      | 8                  | 204.7 | 8.169                 | 207.5 | .1063                                  | 45                           | 300/100                 | 390/130                          |
| VF1000     | 10                 | 253.0 | 10.118                | 257.0 | .1181                                  | 35                           | 100                     | 181.0                            |
| VF1200     | 12                 | 304.8 | 12.126                | 308.0 | .1181                                  | 30                           | 100                     | 195.0                            |
| VF1400     | 14                 | 355.6 | 14.134                | 359.0 | .1181                                  | 30                           | 100                     | 262.0                            |
| VF1600     | 16                 | 406.4 | 16.142                | 410.0 | .1181                                  | 30                           | 100                     | 310.0                            |