




**WEST MICHIGAN RUBBER & SUPPLY**  
**1.800.533.9677**  
**sales@westmichiganrubber.com**

# T405LL - 150 PSI White Food Transfer Hose

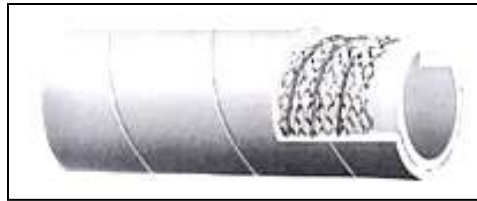

**APPLICATION**

Liquid, fatty and oily food and alcoholic beverage suction and delivery.

Hose may be sterilized with 30 PSI steam at 266°F for 30 minutes *maximum* – open end only.

★ Not recommended for dry abrasive materials.

**COVER**

White NBR/PVC – abrasion, ozone and oil resistant.

**REINFORCEMENT**

Spiralled high tensile textile cords, and 4 highly flexible steel helix wires.

**TUBE**

White NBR. Meets FDA and 3A requirements.

**TEMPERATURE RANGE**

-22°F (-30°C) to 176°F (+80°C)

**STANDARD LENGTH**

100 feet

**WORKING PRESSURE**

Constant Pressure — 10 Bar (150 PSI)

**BRANDING**

ALFAGOMMA – ITALY T405 10 BAR (150 PSI) – GENERAL PURPOSE FOOD QUALITY – S & D (black letters)

## Nominal Specifications

SERIES NO.	NOMINAL ID		NOMINAL OD		APPROX. WT. lbs./100 ft.	MIN. BEND RADIUS (in.)
	(in.)	(mm)	(in.)	(mm)		
T405LL100	1	25	1.46	37	59	3
T405LL150	1 1/2	38	1.97	50	81	4 1/2
T405LL200	2	51	2.48	63	105	6
T405LL300	3	76	3.46	88	165	9
T405LL400	4	102	4.57	116	228	12